


## H05VV-F 2x0,75mm2

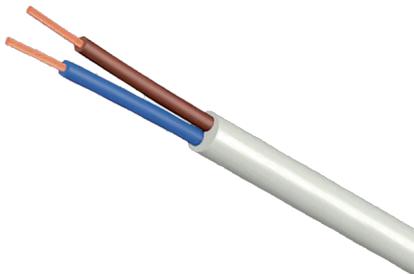

???????????: ??? ?????????????? ??????

?????

?????? ??? ?? ??? 0,39 €

???? ?? ??????? 0,32 €

???? ??????? ?? ???????

???? ??????? 0,39 €

???? ??????? ?????? ??? 0,32 €

????????? ?????? 0,08 €

[????????? ????](#)

?????????????[Elmark](#)

???????????

Cable with parallel or stranded in a bundle insulated cores, used for connection of electrical appliances to the electrical network.  
Also, for connection of mobile devices and appliances.

**Technical characteristics:**

- Flexible cable according to HD 21.5 S3, DIN VDE 0281, part 5
- Rated voltage: U0/U - 300/300V
- Test voltage: 2000V
- Maximum conductor temperature: +70°C
- Ambient temperature: -30°C to +50°C
- Minimum bending radius during installation: 7.5xD
- D - cable height

**Construction:**

- Flexible Copper wires, class 5 according DIN VDE 0295, IEC 60228
- Insulation: PVC compound
- Colour coding: according DIN VDE 0293-308
- Sheath: PVC compound
- Sheath colour: white, black

?????????????: ?????? ??????????: **base\_uom/descry** ??????: C3 ??????????: C323 ??????: 5+2 Five years standard + two years extended

?????: ELMARK

?????: ?????????? ????????

???????: ??????: 2

???????: 0.75 mm<sup>2</sup>

???????: 5+2

\*?????????: ???? ??? ?????